


WISC DOT approved retaining wall system




Legend

- 18" W x 22" D x 8" H
- 1.0 sq. ft., 16/pallet
- 131 lbs., 1.0" setback
- Matching base block



Legend

Classic 8



Classic 8

- 18" W x 12" D x 8" H
- 1.0 sq. ft., 24/pallet
- 85 lbs., 1.0" setback
- Matching base block



Gray



Sandstone

TEST	METHOD	REQUIREMENT	
		Dry-cast	Wet-cast
Compressive Strength (psi)	ASTM C140	5000 min.	4000 min.
Air Content (%)	AASHTO T152	N/A	6.0 +/-1.5
Water Absorption (%)	ASTM C140	6 max. ^[3]	N/A
Freeze-Thaw Loss (%) 40 cycles, 5 of 5 samples 50 cycles, 4 of 5 samples	ASTM C1262 ^[1]	1.0 max. ^{[2][3]} 1.5 max. ^{[2][3]}	N/A

The Advantages of the Legend® and Classic® 8 Block Systems...

Fast: Pinless block designs with lower weight per sq. ft. reduces construction time, labor and freight costs.

Simple: "One Unit" construction is a vital element of their design. 90° corners and half blocks are made simply by removing a portion of the block. No special blocks are required.

Strong: Blocks create vertical "stone columns", when layered with grid, they provide a multi-point interlock for a more uniform block-to-grid connection.

Versatile: Variable setbacks, sharp radius turns, "One Unit" construction.

Tested: Passed current WI DOT requirements.

Straight-split face available in sandstone or gray colors.

Refer to actual product samples when making color selection.





Rochester
Concrete Products™

Manufactured by:

7200 N. Broadway, Rochester, MN 55906
Phone: 507-288-8850 • Fax: 507-535-1487
www.rochesterpcp.com

©Copyright 2019. All Rights Reserved. This information has been prepared for the benefit of customers interested in Rochester Concrete Products. It was reviewed carefully prior to publication. Rochester Concrete Products assumes no liability for its accuracy or completeness. Final determination of the suitability of any information or material for the use contemplated, or for its manner of use, is the sole responsibility of the user. 1219



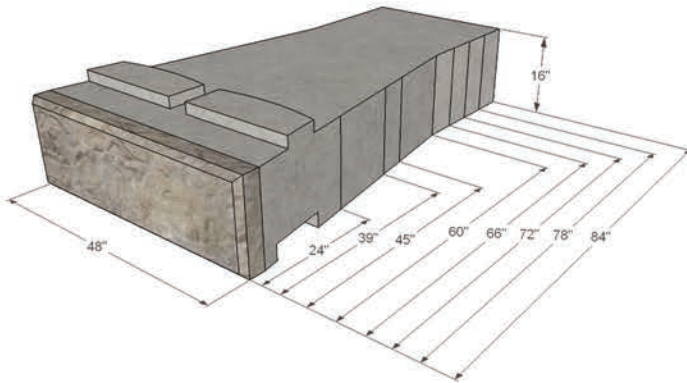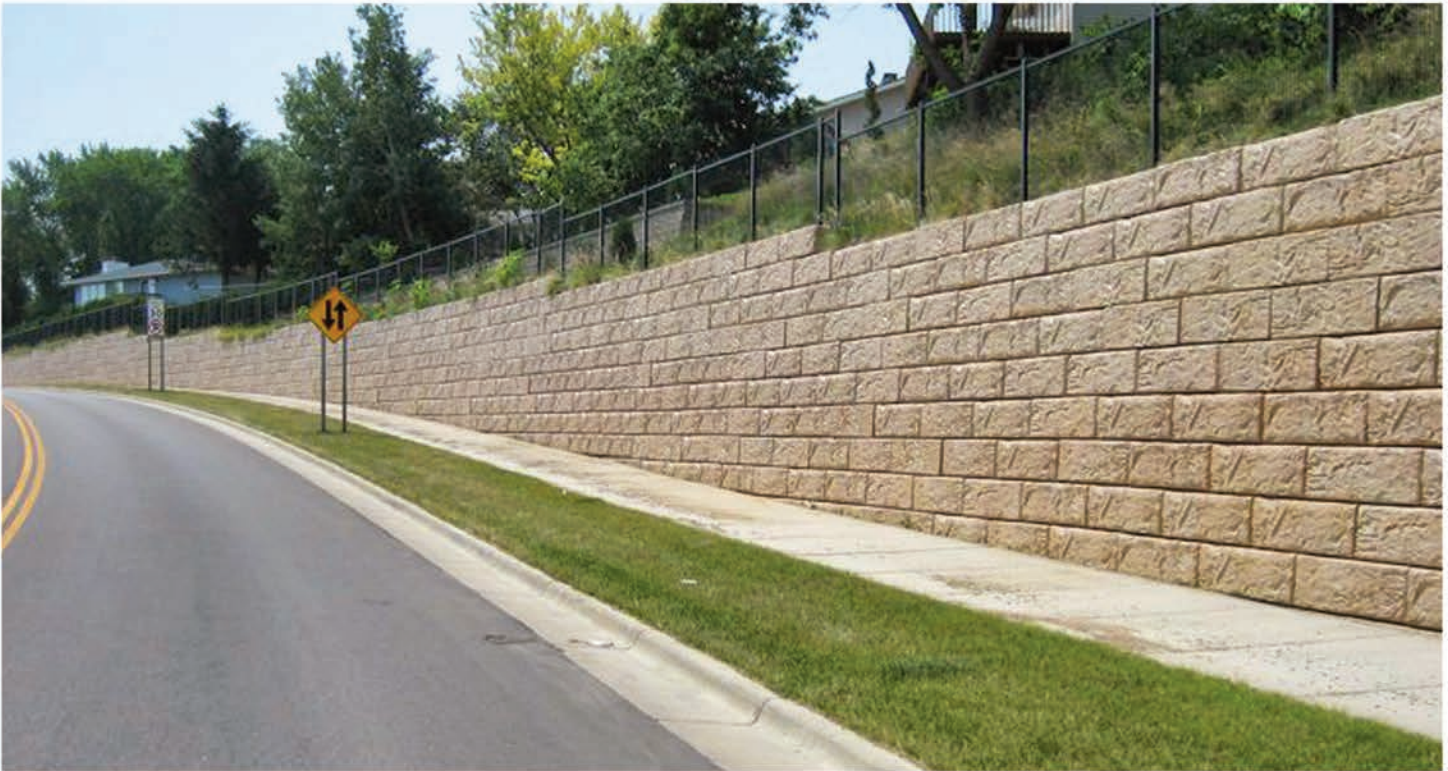

ReCon Wall System:

- Strong, wet cast blocks 1,457 to 4,088 lbs.
- 24" to 84" D x 48" W x 16" H
- Regular corner and cap blocks
- Half block (24" or 39" deep)
- Full fence or full high end/cap blocks
- Available in two unique faces
- Gray color (stain applied after construction)
- Passed current WI DOT requirements.

TEST	METHOD	REQUIREMENT	
		Dry-cast	Wet-cast
Compressive Strength (psi)	ASTM C140	5000 min.	4000 min.
Air Content (%)	AASHTO T152	N/A	6.0 +/-1.5
Water Absorption (%)	ASTM C140	6 max. ^[3]	N/A
Freeze-Thaw Loss (%) 40 cycles, 5 of 5 samples 50 cycles, 4 of 5 samples	ASTM C1262 ^[1]	1.0 max. ^{[2][3]} 1.5 max. ^{[2][3]}	N/A



Le Sueur County Limestone



Weathered Edge



Manufactured by:

7200 N. Broadway, Rochester, MN 55906
 Phone: 507-288-8850 • Fax: 507-535-1487
www.rochesterpc.com

©Copyright 2019. All Rights Reserved. This information has been prepared for the benefit of customers interested in Rochester Concrete Products. It was reviewed carefully prior to publication. Rochester Concrete Products assumes no liability for its accuracy or completeness. Final determination of the suitability of any information or material for the use contemplated, or for its manner of use, is the sole responsibility of the user. 1219

